


SM11 / SM116

Automatic Uniform Size Carton Sealing Machine



SM11 + AG21 Motorized
indexing unit with timer
control (Optional)

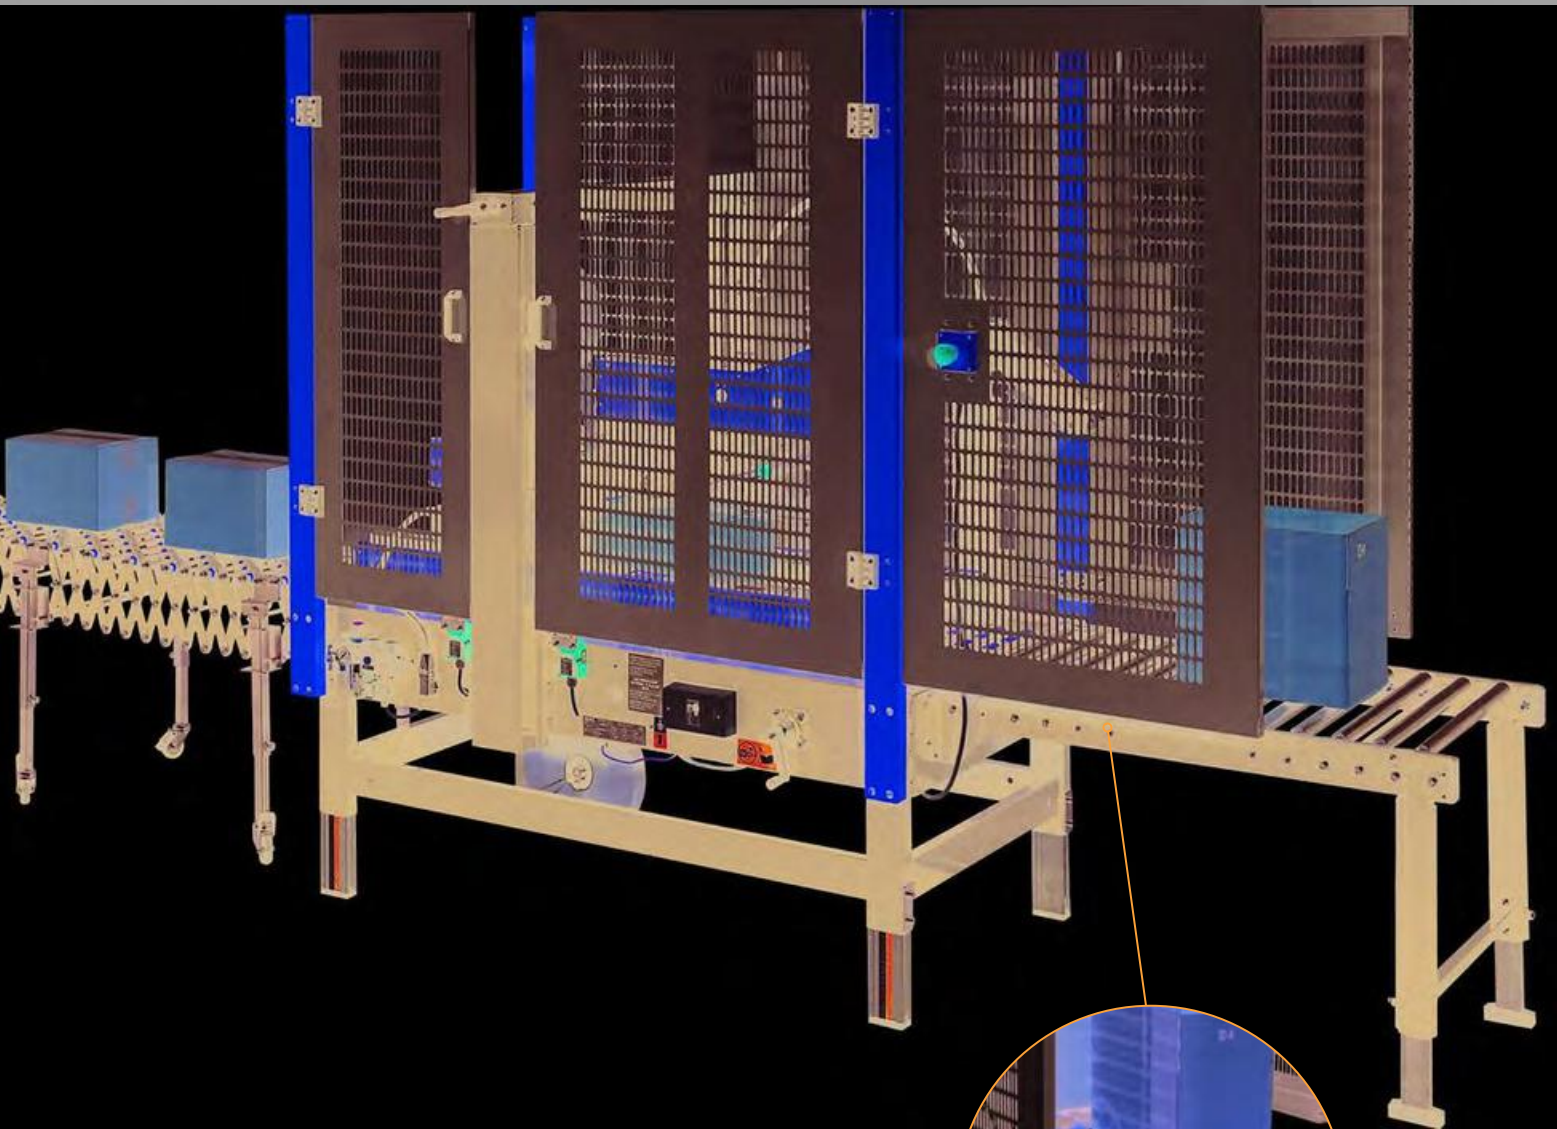

SM11


SM11 model is an automatic “Fixed Format” case sealer: it means that all the adjustments needed to use the machine in a correct way are done manually and for this reason it is used for long runs with same box dimensions. The machine applies automatically two self-adhesive tape stripes on the upper and lower boxes middle line. SM11 adjustment and use is intuitive, simple and fast.

SA11 & SA11/4



Machines with switch to control the movement of the top taping head frame by pneumatic pistons instead of handles & screws.



Low tape/no tape sensor device (Optional)

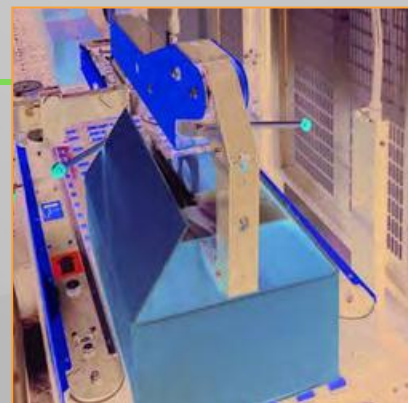


Automatic top flaps folding device

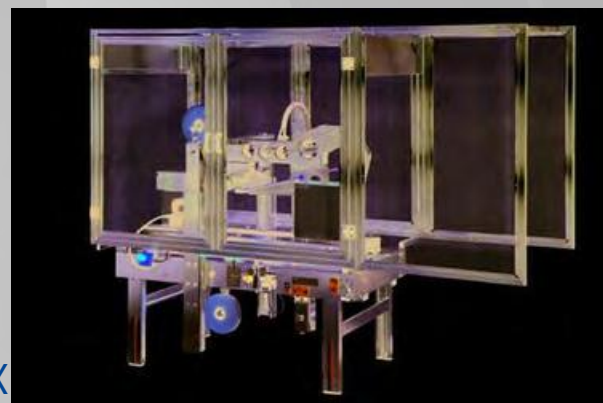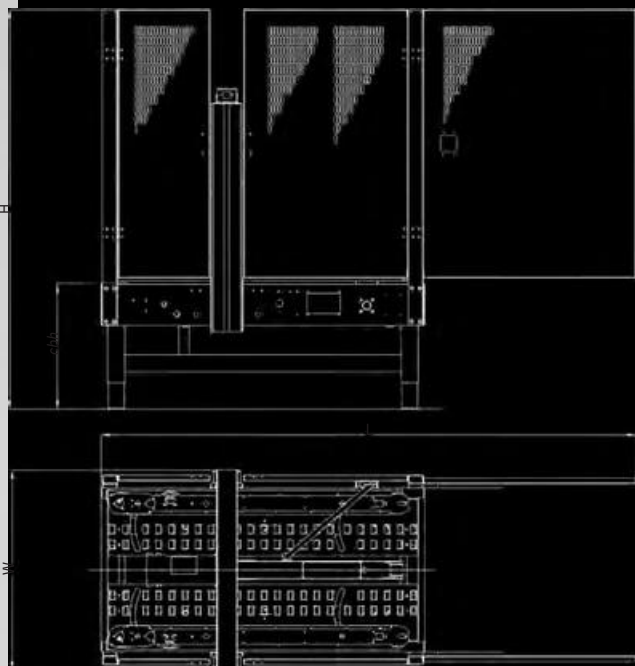



SM11-INOX

Machine suitable in case of use in environments with high humidity or in contact with corrosive substances. Except for the plastic parts, all components of the machine are made in stainless steel.




SM116

Model SM116 machine designed for sealing boxes of medium and large dimensions. It is supplied with taping head K12R – 75 mm width.

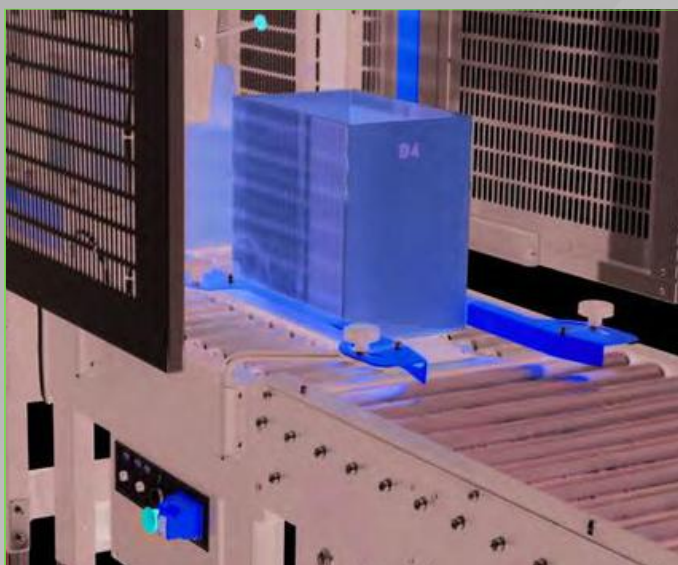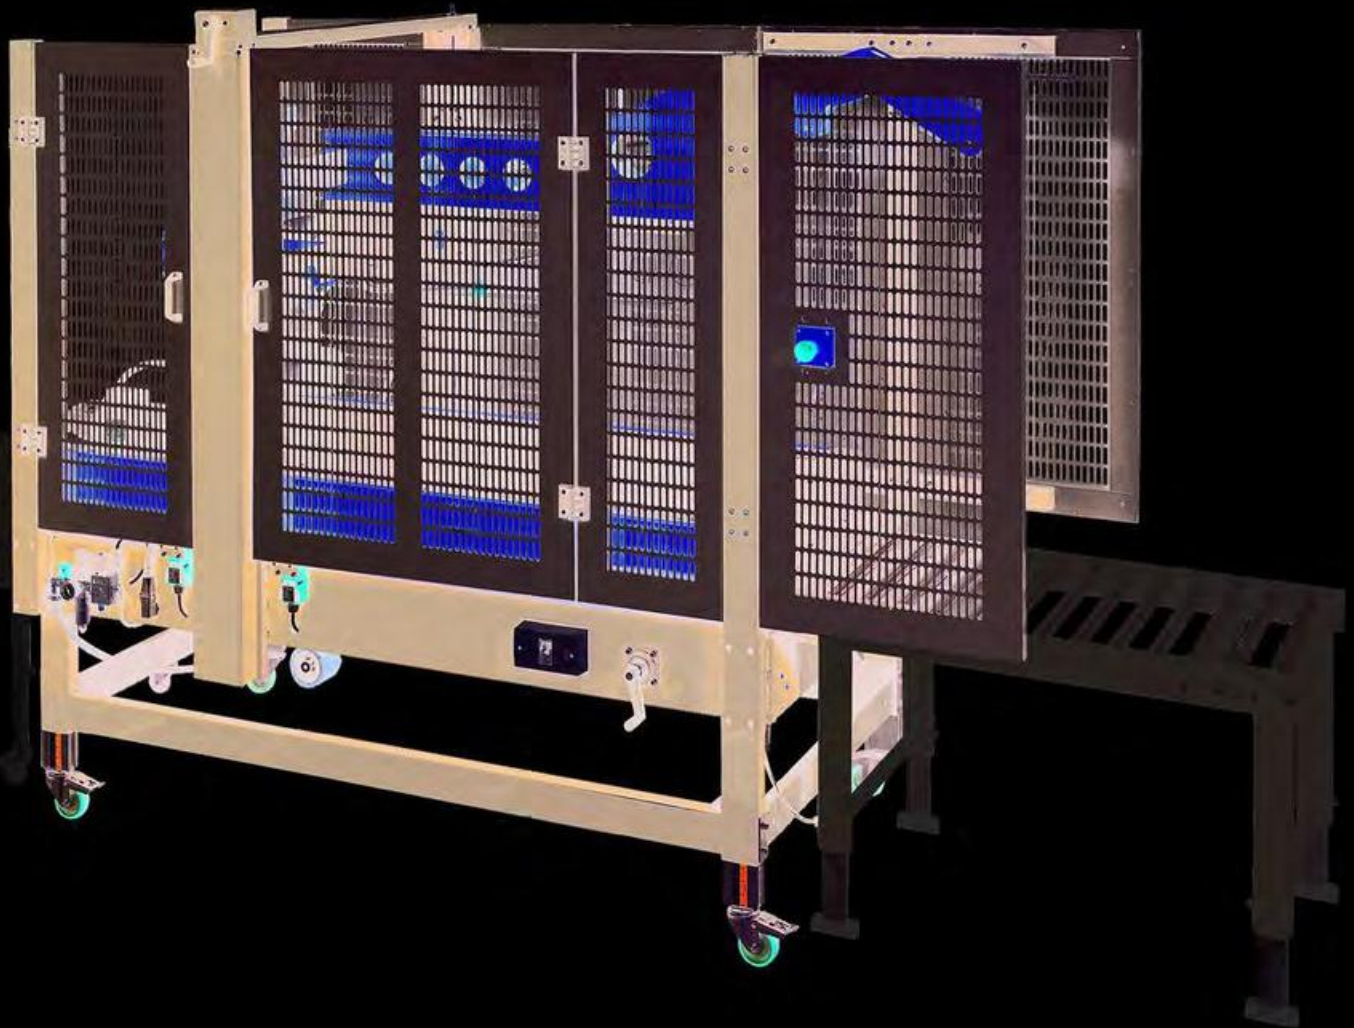

AG21 Motorized indexing unit with timer control (Optional)

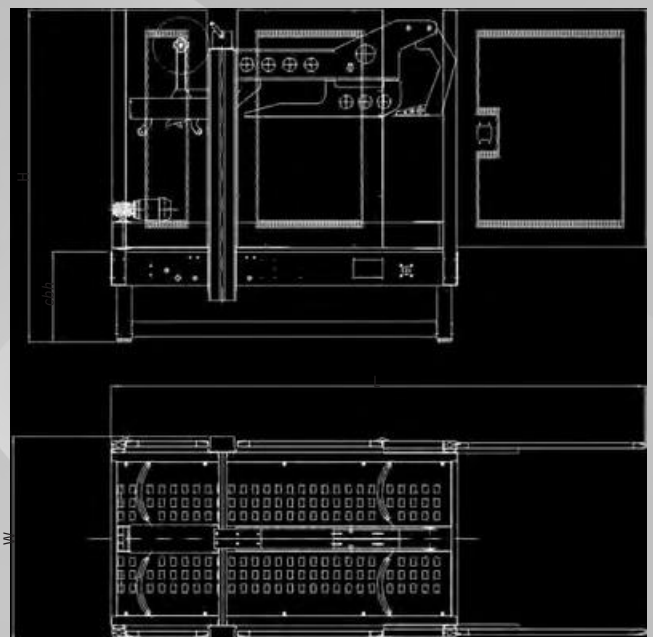

> Machine dimensions


Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de la máquina

Size / Weight packaging			LxWxH 
> SM11	34	39	160x110x20
> SM11/4	0	0	5
> SM116	34	39	160x110x20

0 0 5
50 61 230x150x21

> Box dimensions

Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de las cajas



> SM11

	Min.	Max
L	252	-
W	6	-
H	105	2110
cbh	8	820
AS 77	177	920
AS 80	0	1020

480

> SM11/4

	Min.	Max
L	252	-
W	6	-
H	105	2110
cbh	8	820
AS 77	177	920
AS 80	0	1020

480

> SM116

	Min.	Max
L	283	-
W	4	-
H	105	2110
cbh	8	820
AS 77	177	920
AS 80	0	1020

480

> SM11

	Min.	Max
l	200	600
w	150	500
h	100	600

580

> SM11/4

	Min.	Max
l	200	600
w	105	500
h	100	600

580


> SM116

	Min.	Max
l	300	900
w	150	650
h	180	700

580

> Taping units


Unità nastranti
Verschleseinheiten
Unité enrubanneuse
Unidades de precinto



	K11R / K12R
A	410 Max
B	50 / 75
C	76

> Production capacity

Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción



> SM11	Bph
Max pcs.*	120
	0


* Always based on shorter manageable box

> SM11/4	Bph
Max pcs.*	120
	0

> SM116	Bph
Max pcs.*	900

> Air consumption

Consumo aria
Luftverbrauch
Consommation d'air
Consumo de aire



> SM11	NI
Cycle	. 2


from 5,5 bar to 7 bar

> SM11/4	NI
Cycle	. 2

> SM116	NI
Cycle	. 2

> Standard voltage

Voltaggio standard
Standardspannung
Tension standard
Voltaje estándar



> SM11

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps 1,08	
Power kW0,26	
Phase3Ph + PE	

> SM11/4

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps 1,08	
Power kW0,26	
Phase3Ph + PE	

> SM116

380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps 2	
Power kW0,46	
Phase3Ph + PE	

> Optionals

Accessori
Zubehör
Accessories
Accesorios


> AS80

Higer legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Set patas mas altas



> AS77

Casters
Set ruote
Satz Umlaufräder
Roues
Set ruedas



> RG

Roller conveyor
Piani a rulli Idler
Rollenbahnen
Plans à rouleaux
Tramo de rodillos



> GTL - GTR > K-125 / K-250

Extendable conveyor Inkjet printer
Rulliera estensibile Stampante ad inchiostro
Ausziehbare rollenbahnen Tintenstrahldrucker
Convoyeur extensible Marquer à jet d'encre
Rodillos extensibles Impresora de inyección de tinta

